



INSTALLATION INSTRUCTIONS

Accessory

SEAT-BACK POCKET
P/N 08U13-S2A-100F

Application

2006 S2000

Publications No.

All 31072

Issue Date

OCT 2005

PARTS LIST

Seat-back pocket



Snap screw



Washer



Well nut



TOOLS AND SUPPLIES REQUIRED


Phillips screwdriver

Clip remover

Tapered reamer 1/8" - 1/2"


INSTALLATION

- Slide the passenger's seat all the way forward, and tilt the seat-back forward.
- On the rear bulkhead behind the passenger's seat, locate and remove the lower retaining clip that secures the carpet. Discard the retaining clip.

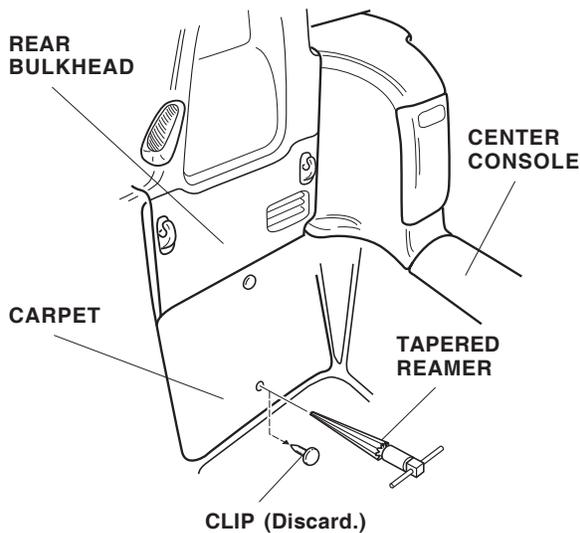

- Using a tapered reamer, slowly enlarge the clip hole a little at a time until the well nut fits into the hole.

- Install the well nut, washer, and snap screw into the enlarged hole, and tighten the screw.

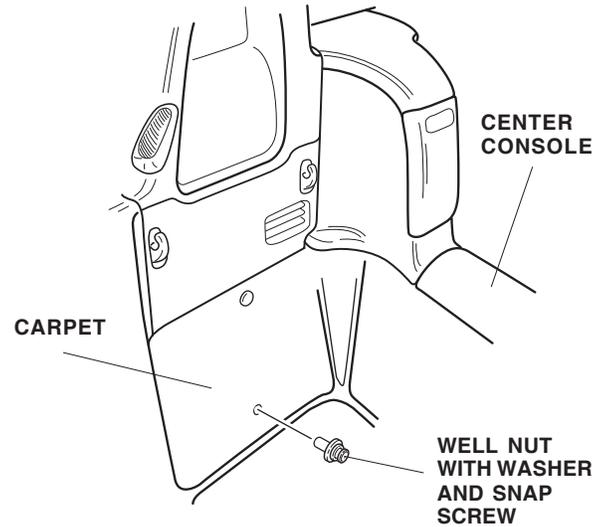

- In an upward motion from the floor up, snap the bottom snap to the seat-back pocket well nut, then attach the two upper straps to the hooks on the rear bulkhead.

